


Select Default Printer

Decide between two options for printing labels

There are two options for printing labels through 2D Transit: printing through your browser or printing through PrintNode.

Printing through your browser is the default option if you change no settings. Clicking the Print Label button will trigger your browser's built-in printing pop-up window. From this window, you can select a printer from the available local or network printers installed on your machine. If you don't see your printer listed in the pop-up window, follow the manufacturer's setup or troubleshooting guide for your operating system.

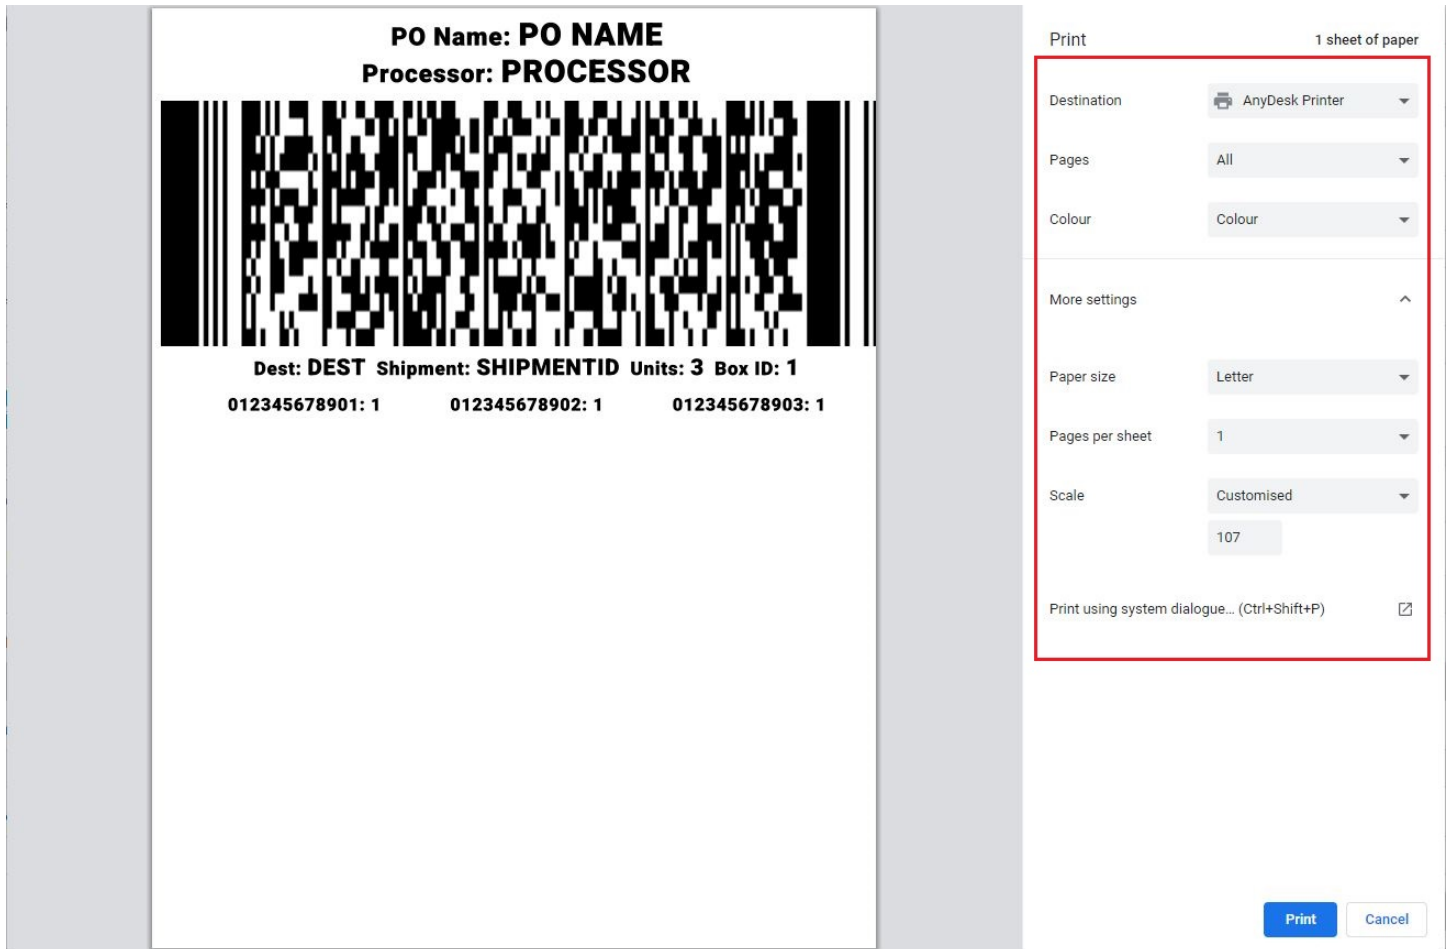

The image shows a shipping label on the left and a browser print dialog on the right. The label contains the following information:

PO Name: PO NAME
Processor: PROCESSOR

Dest: DEST Shipment: SHIPMENTID Units: 3 Box ID: 1
012345678901: 1 012345678902: 1 012345678903: 1

The print dialog on the right is titled "Print" and shows "1 sheet of paper". It includes the following settings:


- Destination: AnyDesk Printer
- Pages: All
- Colour: Colour
- More settings: expanded
- Paper size: Letter
- Pages per sheet: 1
- Scale: Customised (107)
- Print using system dialog... (Ctrl+Shift+P): checked

Buttons for "Print" and "Cancel" are visible at the bottom right of the dialog.

Printing through PrintNode allows you to print labels through the Internet rather than through a local network. It is useful for printing labels remotely or from several different warehouses. To print through PrintNode, follow our guide to set up PrintNode printers.


Select a default printer for your labels

Navigate to the **Default Printer** page using the left navigation menu on the 2D Transit site.

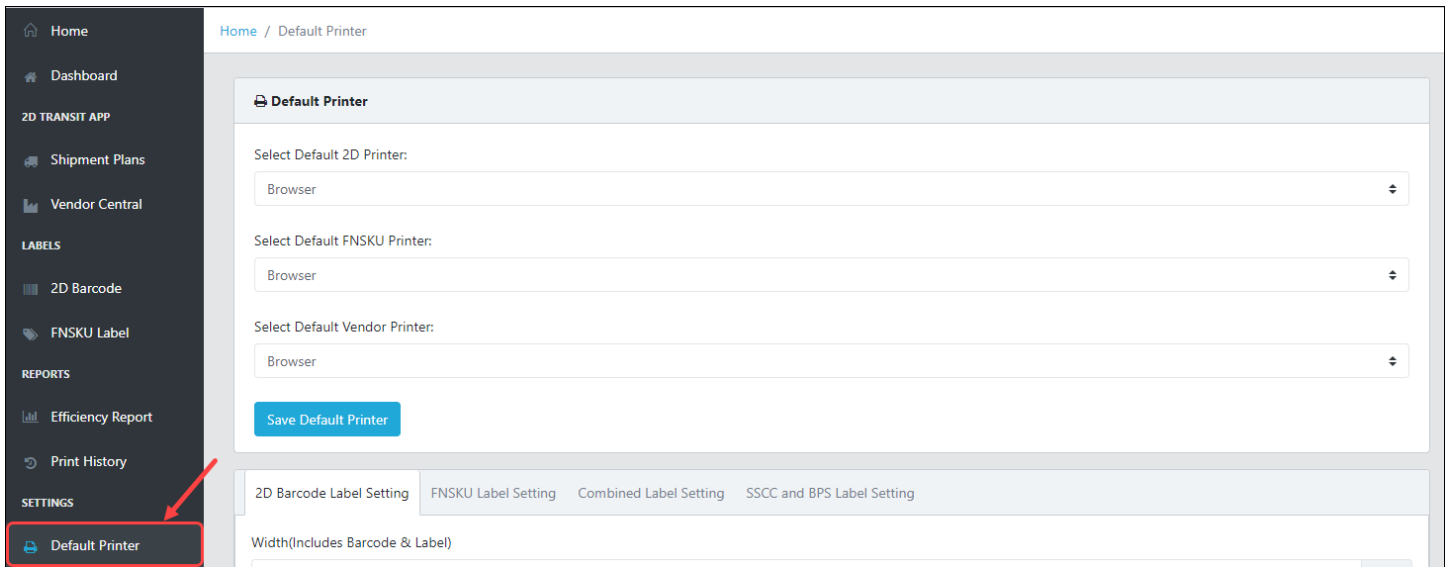

The screenshot shows the 2D Transit site's interface. On the left, a dark navigation menu lists various options, with 'Default Printer' under the 'SETTINGS' section highlighted in red. The main content area is titled 'Default Printer' and contains three drop-down menus for selecting default printers: 'Select Default 2D Printer:', 'Select Default FNSKU Printer:', and 'Select Default Vendor Printer:'. All three menus currently display 'Browser'. Below these menus is a blue 'Save Default Printer' button. At the bottom of the main content area, there are tabs for '2D Barcode Label Setting', 'FNSKU Label Setting', 'Combined Label Setting', and 'SSCC and BPS Label Setting', with '2D Barcode Label Setting' currently selected. Below the tabs, the text 'Width(Includes Barcode & Label)' is visible.

Click the drop-down menus to select a default printer for each type of label. The first drop-down menu controls the printer for 2D barcode or combined 2D labels, followed by controls for the printer for FNSKU labels and lastly the controls for the printer for Vendor Central labels.

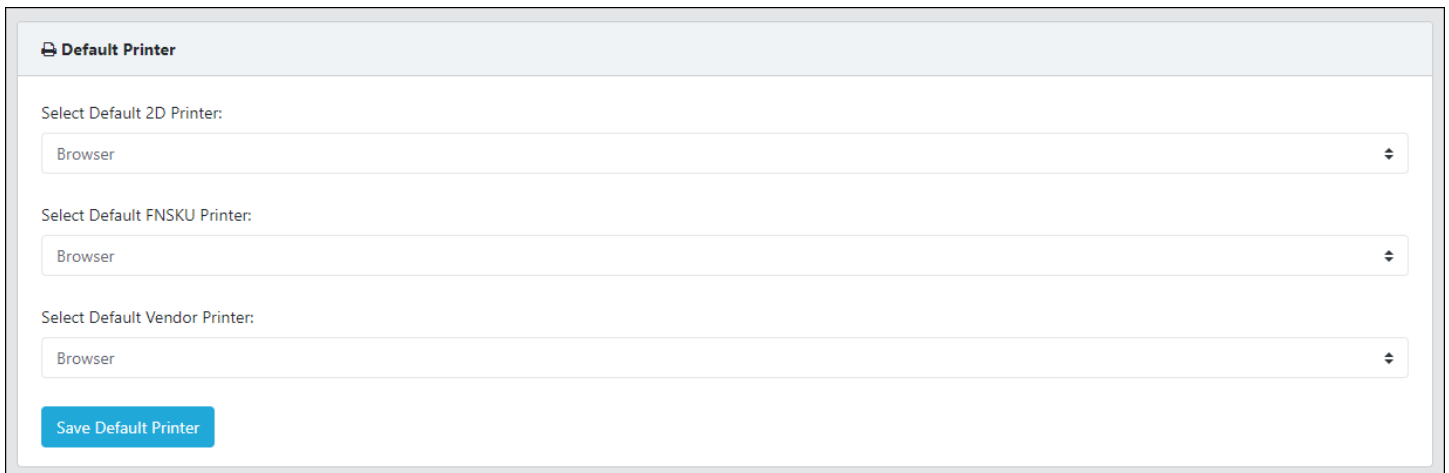

This is a close-up view of the 'Default Printer' settings page. It shows three drop-down menus for selecting default printers: 'Select Default 2D Printer:', 'Select Default FNSKU Printer:', and 'Select Default Vendor Printer:'. All three menus currently display 'Browser'. Below these menus is a blue 'Save Default Printer' button.

If you choose PrintNode from one of the drop-down menus, a secondary drop-down menu will appear. From this menu, select the PrintNode printer you want to use as your default printer.

Default Printer

Select Default 2D Printer:

Printnode

Select Printnode Printer

Select Default FNSKU Printer:

Printnode

Select Printnode Printer

Select Default Vendor Printer:

Printnode

Select Printnode Printer

Save Default Printer

Hit the **Save Default Printer** button. A message will appear to confirm that your settings have been successfully saved.